


Specifications

Model Number: 10-0127
Input Voltage: 230 VAC
Frequency: 50/60 Hz.
Lamp Type: See Chart On Back
Certifications: UL #E191525
Size: 9.5" x 1.72" x 1.0"
Weight: 14 oz.
Mounting: Slotted Mounting Tabs



1. Add jumper between socket contacts, of the lampholder, before connecting the RED and YELLOW wires.
2. Ground case in accordance with the National Electric Code.
3. Remote mounting distance varies with lamp type, consult factory with requirements.
4. Cap and insulate any unused RED wire.
5. When connecting two or three RED wires, they must be joined to make one wire before connecting to the lampholder.

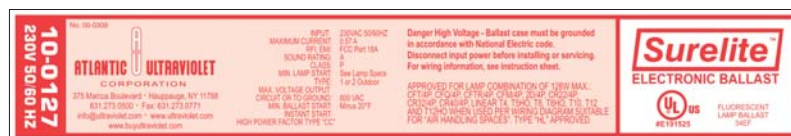


The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.

Lamp Types

Lamp Types	Wiring Diagram
MightyPure® MP49C Lamp Part No. 05-1334-R	1
Sanitron® S50C Lamp Part No 05-1334-R	1
G12T5 - G64T5	1
GPH212T5 - GPH1554T5	2
GHO18T5 - GHO48T5	3
GPH436T5/HO - GPH1148T5/HO	4

This ballast may be acceptable for use with lamps not listed here. Contact us to discuss your requirement.

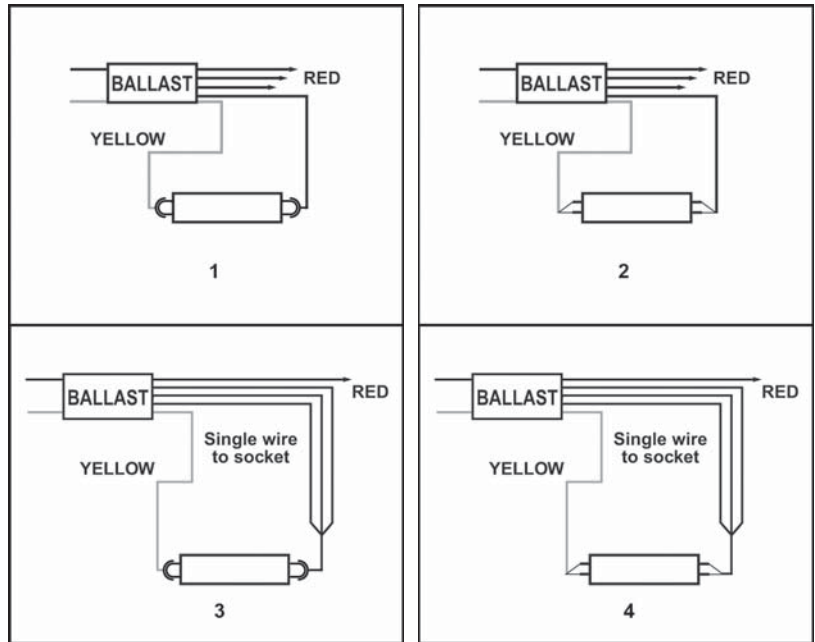

Wiring Diagrams

For 4-Pin Lamp Connections Contact Factory