

**Specifications**

**Model Number:** 10-0136  
**Input Voltage:** 230 VAC  
**Frequency:** 50/60 Hz.  
**Lamp Types:** See Chart On Next Page  
**Certifications:** UL # E191525  
**Size:** 6.5" x 1.5" x 1.0"  
**Weight:** 10 oz.  
**Mounting:** Slotted Mounting Tabs



1. Add jumper between socket contacts, of the lampholder, before connecting the RED and YELLOW wires.
2. Ground case in accordance with the National Electric Code.
3. Remote mounting distance varies with lamp type, consult factory with requirements.
4. Cap and insulate any unused RED wire.
5. When connecting two or three RED wires, they must be joined to make one wire before connecting to the lampholder.



No. 00-0298 <b>10-0136</b> 230V 50/60 HZ	ATLANTIC ULTRAVIOLET CORPORATION 375 Marcus Boulevard • Hauppauge, NY 11788 631.273.0500 • Fax: 631.273.0771 info@ultraviolet.com • www.ultraviolet.com www.buyultraviolet.com TYPE "UL" APPROVED INSTALLED FOR YOUR PROTECTIVE DEVICES	<b>230V HIGH POWER FACTOR</b> INPUT: 230V AC 50/60HZ MAXIMUM CURRENT: 20 AMP REL. EMF: FCC Part 15A SOUND RATING: CLASS: A TYPE: P MAX. VOLTAGE OUTPUT: 1 or 2 Outdoor CIRCUIT OR TO GROUND: 650 VAC INSTANT START MIN. BALLAST START: Minus 20°F MIN. LAMP START: See Lamp Specs	<b>Danger High Voltage!</b> Ballast case must be grounded in accordance with National Electric code. Disconnect input power before installing or servicing. For wiring information, see instruction sheet. APPROVED FOR LAMP COMBINATIONS OF 84 MAX. WATTS OF OSRAM OPTIM. SQUARE CORNUP, CIRCLE, LINEAR T8HO, T8, T8HO, T8, T12 & T12HO LAMPS. WHEN USED FOR WIRING SPECS.	 ELECTRONIC BALLAST  #E191525 FLUORESCENT LAMP BALLAST 34EET
	No. 00-0298			


The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.

**Lamp Types**

Lamp Types	Wiring Diagram
MightyPure® MP16A, Sanitron® S17A Lamp Part No. 05-1098-R	1
MightyPure® MP22A, Sanitron® S23A Lamp Part No. 05-1097-R	1
MightyPure® MP36C, Sanitron® S37C Lamp Part No. 05-1343-R	2
MightyPure® MP49C, Sanitron® S50C Lamp Part No. 05-1334-R	2
G12 - G48T5	2
GPH212 - GPH1148T5	1

This ballast may be acceptable for use with lamps not listed here. Contact us to discuss your requirement.

For 4 Pin Connections, Contact Factory.

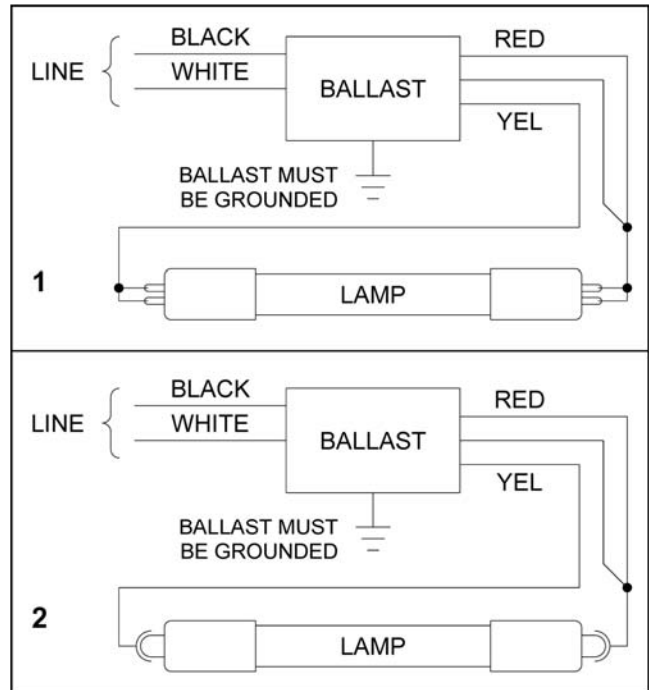

**Wiring Diagrams**