


CONTAINER VALVE BE 250/BE 300

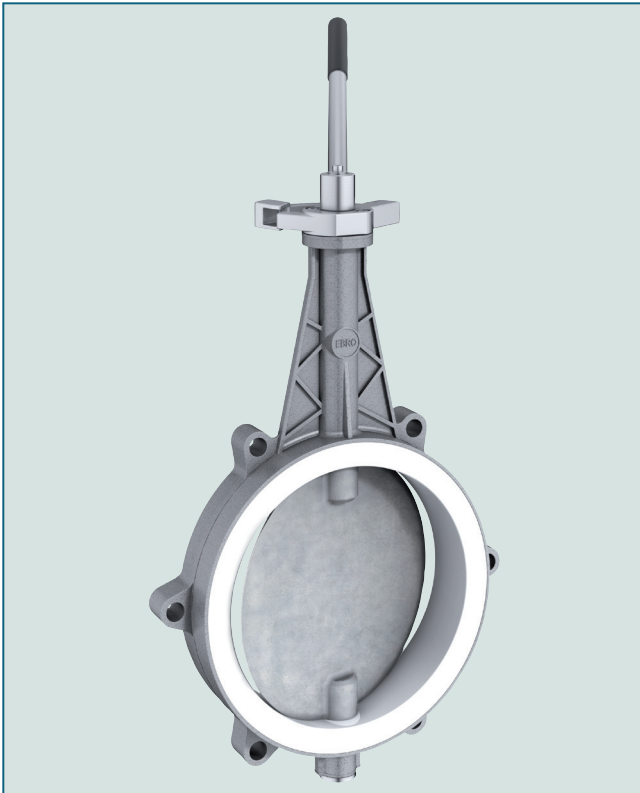

Container valve BE 250 with drain lock bolt.

TECHNICAL DATA

Nominal diameter:	10 inch / 12 inch
Face-to-face:	EBRO works standard
Flange accommodation:	according to the connections in container building
Flange Surface Design:	EN 1092 Form A/B ASME RF, FF
Marking:	EN 19
Tightness check:	EN 12266 (Leakage rate A) ISO 5208, Category 3
Temperature range:	-4°F to +320°F (depending on pressure and medium)
Operating pressure:	max. 15 psi
Body:	Aluminium alloy GD-AlSi9Cu3 (3.2163)
Seat:	EPDM (Ethylene propylene caoutchouc) NBR (Acrylnitrile butadiene rubber) FPM (Fluorocarbon caoutchouc) AU (Polyurethane)
Disc:	Stainless Steel X5CrNi18-10 (1.4301) X6CrNiMoTi17-12-2 (1.4571)

FEATURES


- Shut-off valve for lugging under containers
- Aluminium body
- Suitable for conical containers
- Possibilities for hand operation:
 - drain lock bolt
 - tilting lever
 - engage lever OPEN/CLOSE
- Multiple shaft bearing
- Maintenance-free
- Can be disassembled, material-specific recycling possible

GENERAL APPLICATIONS

- Container building
- Silos



CONTAINER VALVE BE 250/BE 300

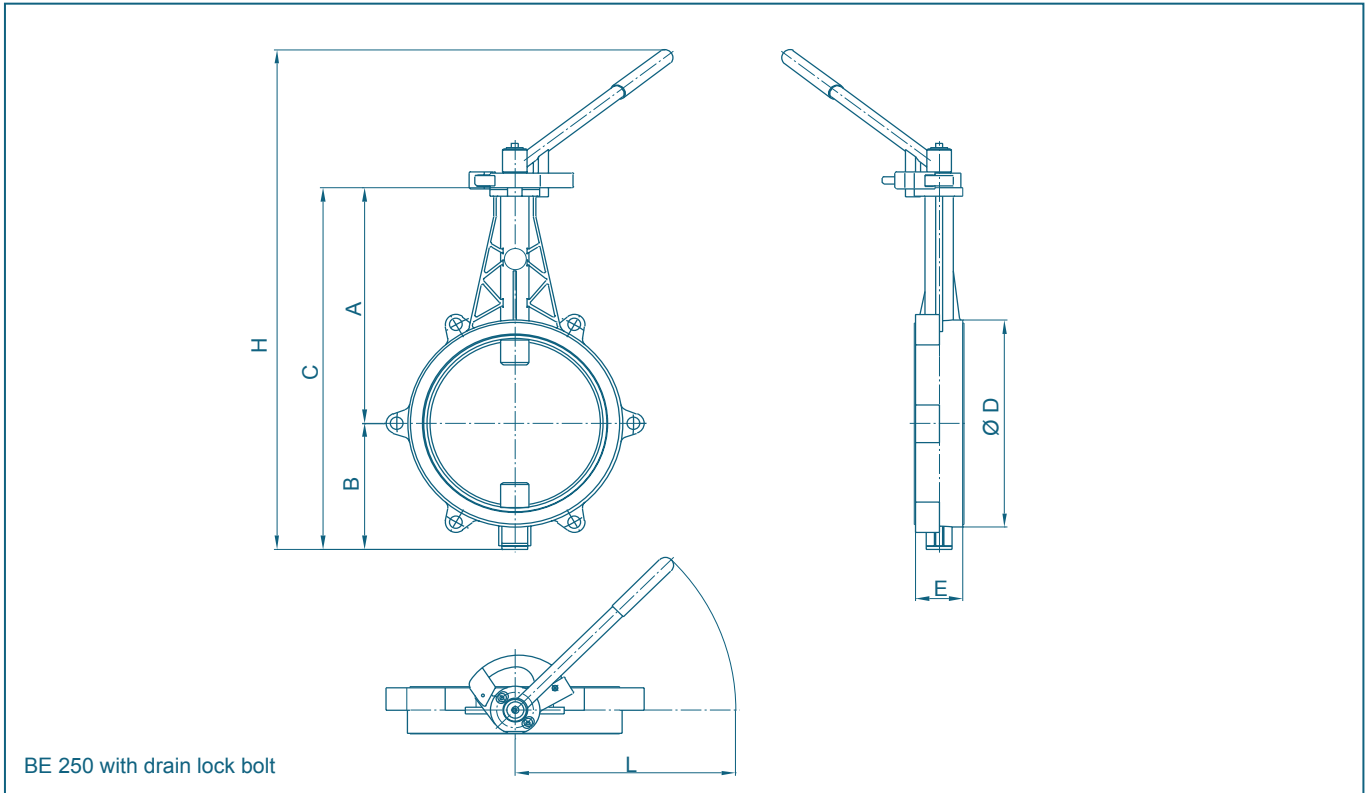

DN [mm]	Size [in]	Dimensions [in]							Weight [lb]
		A	B	C	D	E	H	L	
250	10	13.62	7.28	20.91	11.97	2.64	30.63	15.12	13.70
300	12	10.79	8.90	19.69	13.98	3.07	29.21	15.12	19.60

Subject to change without notice