


Series 2063

Steam Hose – 250 PSI

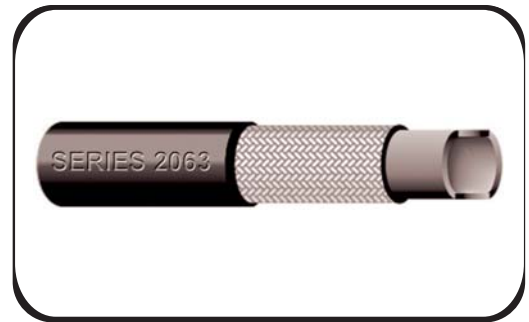

The rugged construction makes this hose an excellent choice for all around steam service in chemical plants, refineries, shipyards and demanding industrial service. **Important: refer to the Unisource safety and technical data information for proper use of this hose.**

Tube:	Black EPDM
Reinforcement:	Multiple wire braids
Cover:	Perforated black EPDM
Temperature:	-40°F to +450°F (-40°C to +232°C)
Branding:	Embossed

Part #	I.D. (In)	O.D. (In)	W.P. (PSI)	Weight (Lbs / Ft)	Std. Length	Stock (Yes) or Min. Order
2063-050	1/2	1.02	250	.40	50'/100'	Yes
2063-075	3/4	1.25	250	.49	50'/100'	Yes
2063-100	1	1.50	250	.84	50'/100'	Yes
2063-125	1-1/4	1.80	250	1.08	50'/100'	Yes
2063-150	1-1/2	2.12	250	1.21	50'/100'	Yes
2063-200	2	2.60	250	1.68	50'/100'	Yes
2063-300	3	3.78	250	2.75	50'/100'	200'