


Series 2086

Butyl Steam Hose – 250 PSI

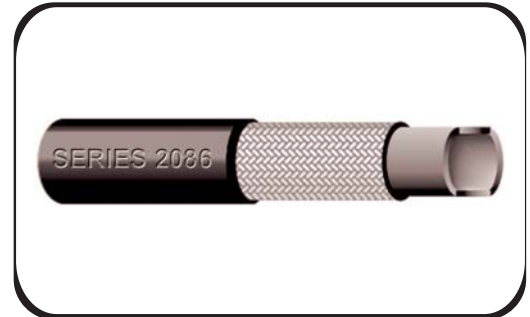

Used for cleaning, heat control, fire prevention, pumping, thawing, blowout service, steam pumps and hoists in open-end or permanent installation operations. It is used in refineries, shipyards, chemical plants, steel mills, foundries and heavy industrial applications where high strength is required and where severe environmental conditions are encountered. **Important: refer to the Unisource safety and technical data information for proper use of this hose.**

Tube:	Black Chlorobutyl
Reinforcement:	Multiple wire braids
Cover:	Perforated black EPDM
Temperature:	0°F to +425°F (-18°C to +218°C)
Branding:	Embossed
Origin:	USA

Part #	I.D. (In)	O.D. (In)	Braids	W.P. (PSI)	Weight (Lbs / Ft)	Std. Length	Stock (Yes) or Min. Order
2086-075	3/4	1.25	2	250	.56	50'	Yes
2086-100	1	1.61	2	250	.84	50'	5000'

Note: Above hose can be coupled with crimp fittings.