


Series 2635 "Mainline" – Premium Water Discharge Hose

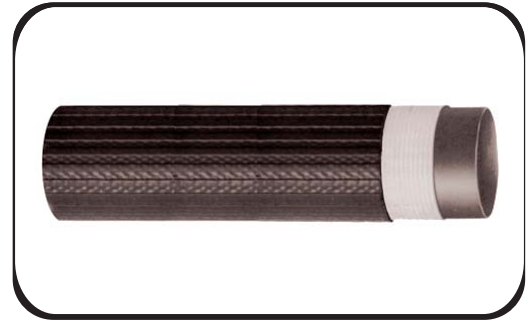

Series 2635 is a lay-flat, medium-duty water discharge and washdown hose that combines the lightweight, compact features of PVC with the durability and abrasion resistance of conventional construction.

This hose features a unique one piece, through-the-weave construction, and attains its working pressure from a synthetic woven textile. It will not mildew or rot, and requires no drying time. Its excellent durability is derived from a high-tensile rubber compound, which completely encases the jacket. Applications include irrigation, washdown, dewatering, coal preparation and utility plants, petrochemical, oil, and gas drilling, jetting and pump discharge, storage tank cleaning, and sewer cleaning. **Made In Germany.**

Construction:	Nitrile compound. Both tube and cover are simultaneously extruded to obtain maximum bending
Reinforcement:	One ply polyester
Temperature:	-36°F to +178°F
Design Factor:	3 : 1
Branding:	None

Part #	I.D.		Wall Thickness (In)	W.P. (PSIG)	Weight (Lbs / Ft)	Std. Length	Stock (Yes) or Min. Order
	(In)	(mm)					
2635-150	1-1/2	38	.08	300	.26	100'/300'	Yes
2635-200	2	52	.08	250	.36	100'/300'	Yes
2635-250	2-1/2	65	.08	250	.46	100'/300'	Yes
2635-300	3	75	.10	230	.52	100'/300'	Yes
2635-400	4	102	.10	200	.72	100'/300'	Yes
2635-600	6	152	.13	175	1.25	50'/100'	Yes
2635-800	8	205	.16	150	1.70	50'/100'	Yes