


# Interroll EC110 24 Volt DC RollerDrive

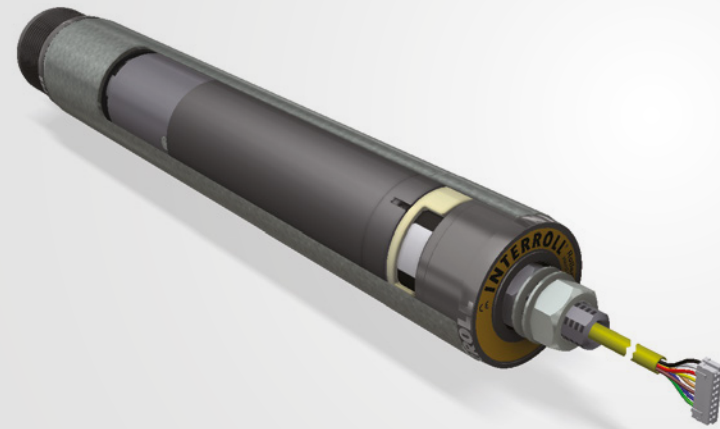

## Product Features

- Wide speed range
- Multiple drive options
- Optional PVC or polyurethane sleeving
- Safe, low voltage

## Product Benefits

- Modest total cost of ownership
- Low energy consumption
- Rapid installation
- Maintenance free
- Fast ROI

## Technical Data

### General technical data, RollerDrive EC110


Diameter	1.9"
Nominal voltage	22-28 VDC
No load current	0.6 A
Max. continuous current	2.5 A
Max. start current	4.1 A
Mechanical performance	31 W
Drive efficiency	52%
Noise level	55 dB(A)
Minimum length	10.60"-14.24" (depending on application)

### EC110 RollerDrive Performance

Gear Ratio	Speed Range Ft/min	Nominal Torque Inch-lb	Peak Torque Inch-lb
9:1	70-211	6.6	23.0
12:1	52-158	8.9	31.0
16:1	39-119	13.3	37.0
24:1	26-79	19.5	51.0
36:1	17-53	25.7	81.0
48:1	13-40	30.1	102.0
64:1	10-30	37.6	117.0

The **Interroll RollerDrive EC110** is an economical, high-performance brushless 24 volt DC internally motorized drive roller.

## Dimensions

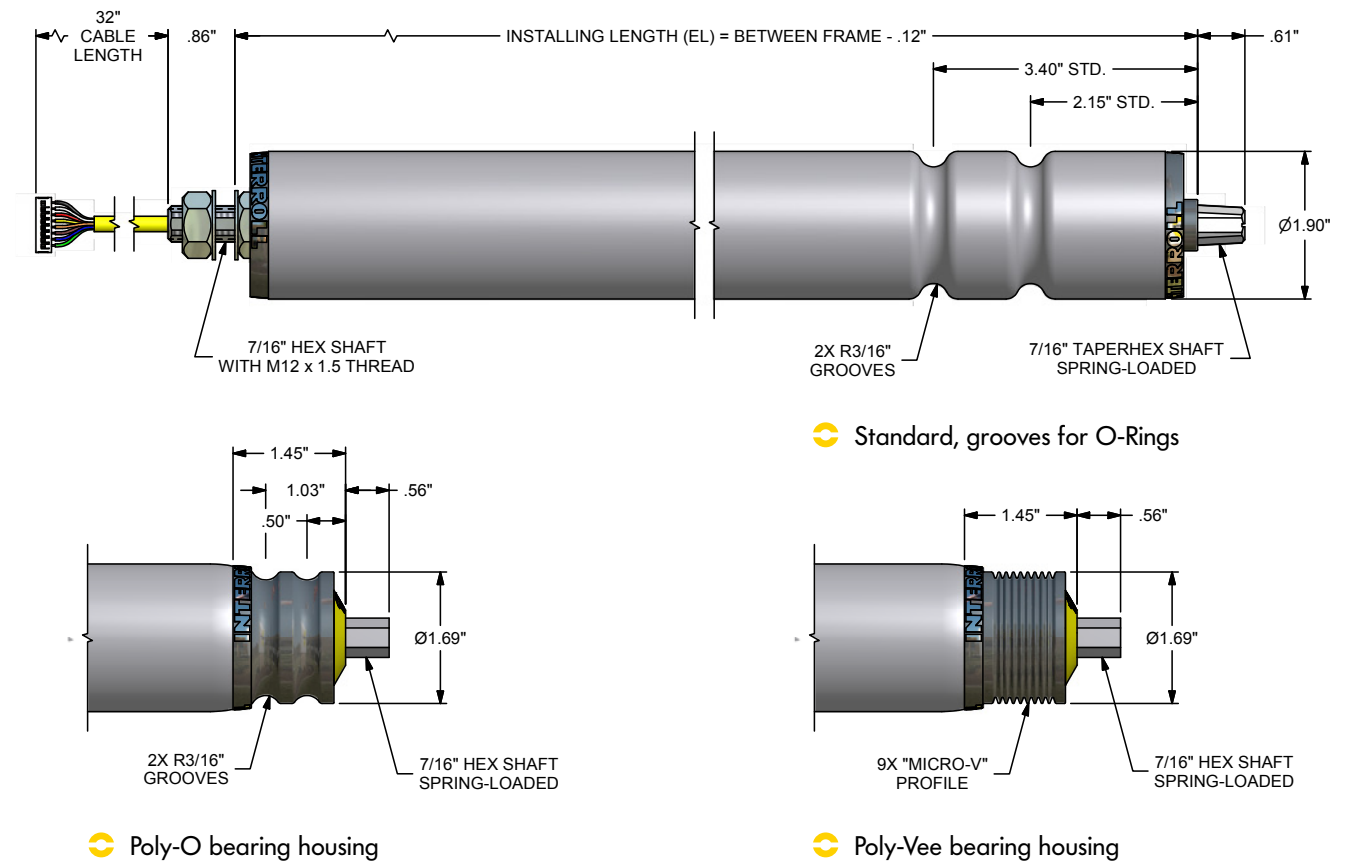

## How to order

Please create a reference number with the following configurator.

