

RM 8830

Interroll Lift-Up Gate



Product Description


The lift-up gate swivels upward to provide a walkway, or access from one side of the conveyor to the other. This allows access to the rear of the conveyor, and the ability to plan quicker escape routes, in case of an emergency. The pivoting movement is operated by an innovative rotary mechanism.

Technical data

General technical data	Max. load capacity*	100 kg (incl. fitted module)
	Ambient temperature	-5 to +40 °C
	Incline/decline	Not suitable

* The combination of maximum values is not always possible.

Dimensions

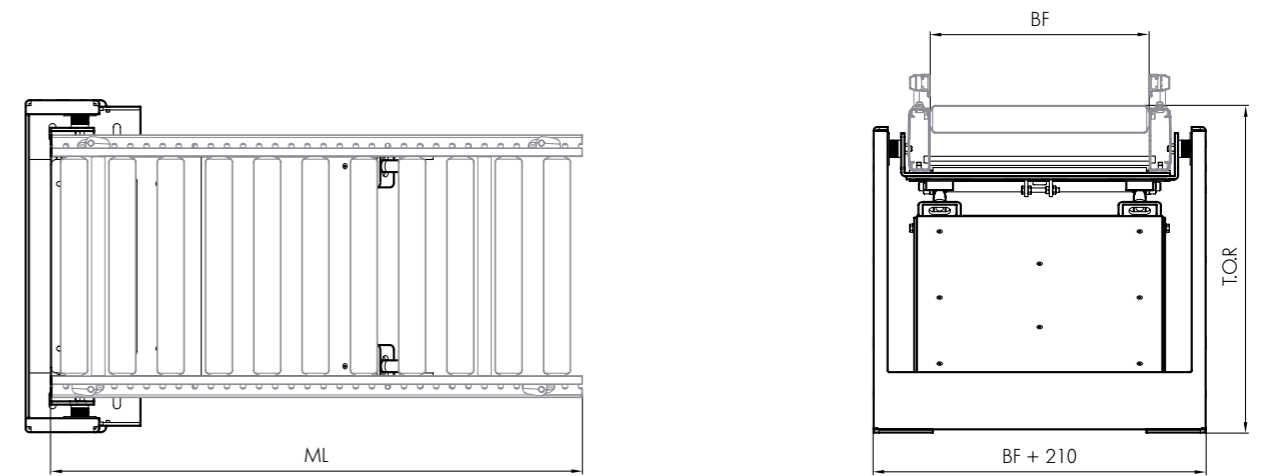

BF	Between frames	420, 620, 840 mm others on request
T.O.R.	Min. height of top edge of roller	700 mm
ML	Module length	1000 to 1300 mm
	Channel width	ML - 220 mm

Scope of supply

- The module is fully assembled
- Please order fitted conveyor module separately