



INTERROLL ROLLER CONVEYOR RM 5113


The non-driven, straight roller conveyor transports material either manually or over a gradient via gravity. It is mostly used for assembly and picking lines as well as for dynamic storage systems.

Technical Data

General technical data	
Max. load capacity	70 lb/ft (100 kg/m)
Inclined/declined	Suitable for declines
Ambient temperature	+25 to +125 °F (-5 to +50 °C)
Roller	
Roller type	Interroll Series 1100, Smooth-Running Conveyor Roller Interroll Series 1700, Universal Conveyor Roller
Roller diameter	1.9"
Roller material	Steel, zinc-plated PVC
Side frame	
150 mm (6") Extrusion	6" (150 mm) high, 2.6" (65 mm) above top of roller
80 mm (3.15") Extrusion	Allows lateral shifting 3.15" (80 mm) high, 0.16" (4 mm) below top of roller
Combination of frame heights left/right	6" / 6" (150 mm / 150 mm) 6" / 3.15" (150 mm / 80 mm) 3.15" / 6" (80 mm / 150 mm) 3.15" / 3.15" (80 mm / 80 mm)



Dimensions

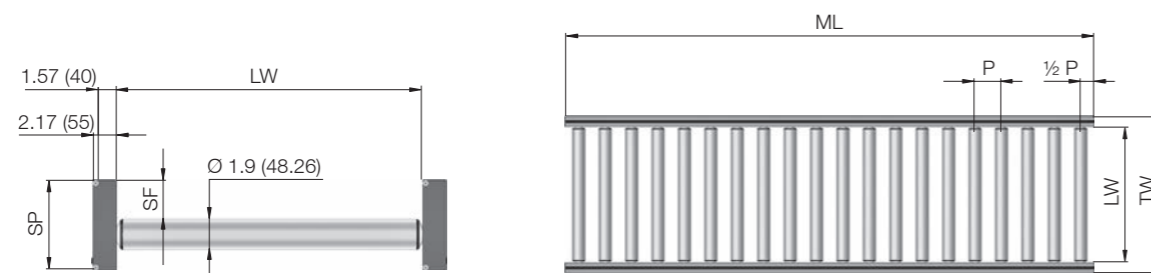


Dimensions	
LW Clearance	12" to 40" in 2" increments (310 mm to 1,010 mm in 50 mm increments)
ML Max. module length	120" (3,000 mm)
TW Module width	LW + 3.31" (84 mm)
P Roller pitch	2" / 3" / 4" / 5" (50 mm / 75 mm / 100 mm / 125 mm)
SP Side frame	3.15" / 6" (80 mm / 150 mm)
SF Side guide	0.16" / 26" (4 mm / 65 mm)

Order Information

- The module is fully assembled
- Please order support legs and end caps separately
- Steel components are powder-coated (in black RAL 9005 or in gray RAL 7030) or zinc-plated

Please create the reference number with the following configurator.

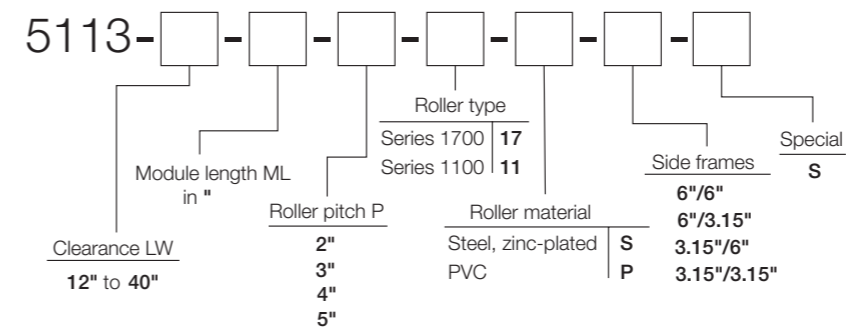

If you require a non-standard version, add an „S“ to the end and describe your requirements.

Example of a reference number: 5113-20-120-4-17-S-6/6

This reference number stands for Interroll Roller Conveyor RM 5113 with a clearance LW 20" (510 mm), a module length ML 120" (3000 mm), a roller pitch P 4" (100 mm), roller type series 1700, zinc-plated steel rollers and side frames with dimensions of 6"/6" (150 mm/150 mm).

Accessories

- Support legs, see from 134
- End caps, see 116
- End stop, see 74

Scope of supply

Configurator

Order example