

# INTERROLL BALL TABLE RM 5761




Roller Conveyors  
**Gravity**  
RM 5761  
Ball Table

Ball tables with omniwheels are especially suitable for workstation and inspection areas and for material with soft bases that can be moved in any direction with very little force.

## Technical Data

General technical data	
Max. load capacity	36 lb/ft (60 kg/m)
Inclined/declined	Not suitable
Ambient temperature	+25 to +125 °F (-5 to +50 °C)
Side frame	
150 mm (6") Extrusion	6" (150 mm) high, 2.6" (65 mm) above top of wheel
80 mm (3.15") Extrusion	Allows lateral shifting 3.15" (80 mm) high, 0.16" (4 mm) below top of wheel
Combination of frame heights left/right	6" / 6" (150 mm / 150 mm) 6" / 3.15" (150 mm / 80 mm) 3.15" / 6" (80 mm / 150 mm) 3.15" / 3.15" (80 mm / 80 mm)

## Dimensions

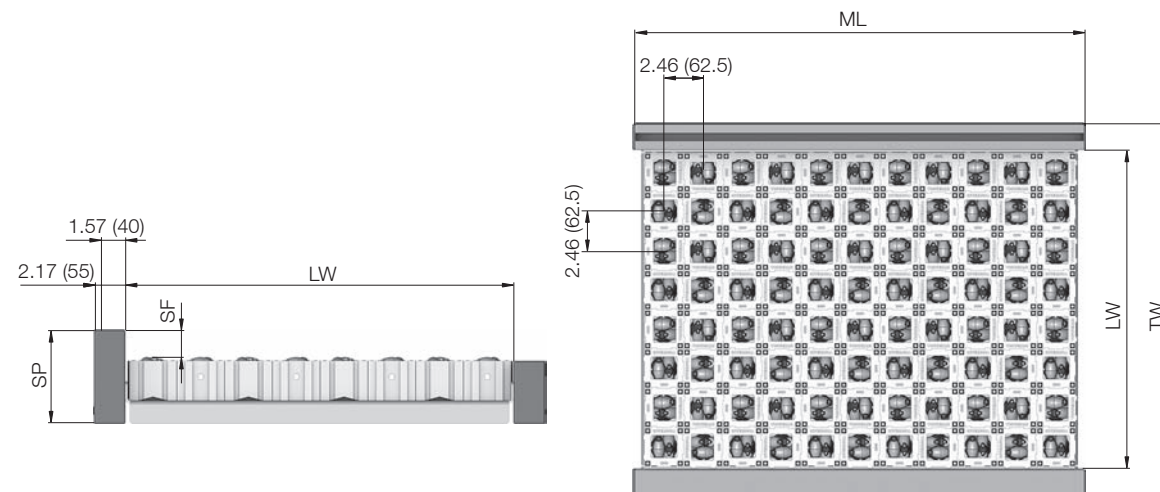


Dimensions	
LW Clearance	8" to 40" in 2" increments (210 mm to 1,010 mm in 50 mm increments)
ML Max. module length	120" (3,000 mm)
TW Module width	LW + 3.31" (84 mm)
Pitch	2.46" (62.5 mm)
SP Side frame	3.15" / 6" (80 mm / 150 mm)
SF Side guide	0.16" / 26" (4 mm / 65 mm)

## Order Information

- The module is fully assembled
- Please order support legs, end caps and end stop separately
- Steel components are powder-coated (in black RAL 9005 or in gray RAL 7030) or zinc-plated

Please create the reference number with the following configurator.

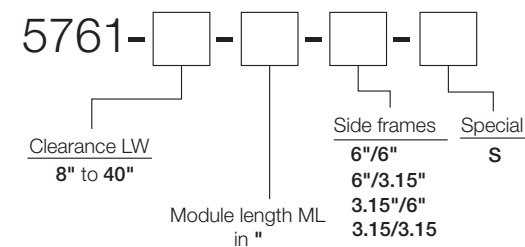

If you require a non-standard version, add an „S“ to the end and describe your requirements.

### Example of a reference number: 5761-20-40-6/3.15

This reference number stands for Interroll Ball Table RM 5761 with a clearance LW 20" (510 mm), a module length ML 40" (1000 mm) and side frames with dimensions of 6" 3.15" (150 mm/80 mm).

## Accessories

- Support legs, see from 134
- End caps, see 116
- End stop, see 74

Scope of supply

Configurator

Order example