

# Model 230

## True Wet-to-Wet Differential Pressure Transducer

The Model 230 is Setra's highest accuracy solution for monitoring differential pressure in wet-to-wet applications. Its single diaphragm design enables a true wet-to-wet differential pressure measurement with superior  $\pm 0.25\%$  FS accuracy compared to competitive units which calculate differential pressure using two single point pressure sensors. The stainless steel capacitive sensor provides a highly accurate, linear analog output proportional to the pressure over a wide temperature range. The 230 is offered with an optional 3 or 5 valve machined brass manifold for ease of installation and maintenance.

### Avoid Line Pressure w/ Single Diaphragm Sensor

Unlike the competition, the 230 is a true wet-to-wet sensor with a single diaphragm construction. The differential pressure range of a single diaphragm is not impacted by line pressure whereas dual differential pressure sensors require the individual sensors to measure gauge pressure, comparing the outputs to determine the differential pressure.

### Increase the Sensors Response Time

The 230 utilizes an all stainless steel capacitive sensor which responds 20x faster than oil filled sensors and provides conditioned electronic circuitry with a highly accurate, linear analog output proportional to the pressure over a wide temperature range.

### Save Time on Money & Installation

When time and project costs are a priority, the 230 is offered with an optional 3 or 5 valve machined brass manifold for ease of installation and maintenance. The brass body has no internal process connections, therefore eliminating the risk of internal leaks.



- Single Diaphragm Design
- All Stainless Steel Capacitive Sensor
- 3 or 5 Valve Manifold Assembly Options

#### Model 230 Features:

- $\pm 0.25\%$  FS Accuracy
- No Liquid Fill Diaphragm
- NEMA 4 Rated Housing
- Low Line Pressure Effect
- Fast Response Time
- Gas & Liquid Compatible
- Meets CE Conformance Standards

#### Applications:

- Energy Management Systems
- Process Control Systems
- Flow Measurement of Various Gases or Liquids
- Liquid Level Measurement or Pressurized Vessels
- Pressure Drop Across Filters

# Model 230

## True Wet-to-Wet Differential Pressure Transducer



### PROOF PRESSURE

### GENERAL SPECIFICATIONS

| Unidirectional         |                                 |                                |
|------------------------|---------------------------------|--------------------------------|
| Pressure Range<br>PSID | Proof Pressure<br>High Side PSI | Proof Pressure<br>Low Side PSI |
| 0 to 1.0               | 50                              | 2.5                            |
| 0 to 2.0               | 50                              | 5                              |
| 0 to 5.0               | 100                             | 12.5                           |
| 0 to 10.0              | 100                             | 25                             |
| 0 to 25.0              | 350                             | 62.5                           |
| 0 to 30.0              | 350                             | 75                             |
| 0 to 50.0              | 350                             | 125                            |
| 0 to 100.0             | 350                             | 250                            |

| Bidirectional          |                                 |                                |
|------------------------|---------------------------------|--------------------------------|
| Pressure Range<br>PSID | Proof Pressure<br>High Side PSI | Proof Pressure<br>Low Side PSI |
| 0 to ±0.5              | 50                              | 1.25                           |
| 0 to ±1.0              | 50                              | 2.5                            |
| 0 to ±2.5              | 100                             | 6.35                           |
| 0 to ±5.0              | 100                             | 12.5                           |
| 0 to ±10.0             | 200                             | 25                             |
| 0 to ±25.0             | 350                             | 62.5                           |
| 0 to ±50.0             | 350                             | 125                            |

| Performance Data   |  | Physical Description (Model 230)  |  |
|--|--|---|--|
| Accuracy RSS <sup>1</sup> (at constant temp)   | ±0.25% FS  | Case  | Stainless Steel/Aluminum   |
| Non-Linearity, BFSL  | ±0.20% FS  | Electrical Connection   | Barrier strip terminal block with conduit enclosure & 0.875 DIA conduit opening.   |
| Hysteresis   | 0.10% FS   | Pressure Fittings   | 1/4"-18 NPT internal   |
| Non-Repeatability  | 0.05% FS   | Weight (approx.)  | 14.4 oz  |
| <b>Thermal Effects<sup>2</sup></b>   |  | Sensor Cavity Volume  | 0.27 in <sup>3</sup> Positive Port, 0.08 in <sup>3</sup> Negative Port   |
| Compensated Range °F(°C)   | +30 to +150 (-1 to +65)                                | (With 1/4"NPT external fittings installed-does not include cavity volume of 1/4"NPT external fittings.) |  |
| Zero Shift %FS/100°F(%FS/50°C)   | 2.0 (1.8)  | <b>Physical Description (3-Valve Manifold Assembly)<sup>4</sup></b>                                     |  |
| Span Shift %FS/100°F(%FS/50°C)   | 2.0 (1.8)  | Manifold Block  | Brass  |
| Line Pressure Effect   | Zero shift ±0.004% FS/PSIG line pressure               | Valves (3) <sup>5</sup>   | V1 for Connection to + port<br>V2 for Connection to - port V3 for Equalizing Pressure  |
| Resolution   | Infinite, limited only by output noise level (0.02%FS) | Valve Type  | 90° On/Off   |
| Static Acceleration Effect   | 2%FS/g (most sensitive axis)                           | Process Connections   | 1/4"-18 NPT Internal Thread  |
| Natural Frequency  | 500 Hz (gaseous media)                                 | Dimensions  | 7.05"W x 6.25"H x 2.16"D   |
| Warm-up Shift  | ±0.1% FS total   | Weight  | <2.5 lbs.  |
| Response Time  | 30 to 50 milliseconds                                  | <b>Physical Description (5-Valve Manifold Assembly)<sup>6</sup></b>                                     |  |
| Long Term Stability  | 0.5%FS/1 YR  | Manifold Block  | Brass  |
| Maximum Line Pressure  | 350 PSIG   | Valve (5) <sup>5</sup>  | V1 for Connection to ± Port<br>V2 for Connection to - Port<br>V3 for Equalizing Pressure<br>V4 & V5 for Connection to External Gauge or Alternate Plumbing Configuration |
| <b>Environmental Data</b>  |  | Process Connection  | 1/4"-18 NPT Internal Thread  |
| Operating <sup>3</sup> Temperature °F (°C)   | 0 to +175 (-18 to +80)                                 | Dimensions  | 7.05"W x 6.25"H x 2.16"D   |
| Storage Temperature °F (°C)  | -65 to +250 (-54 to +121)                              | Weight  | <3.8 lbs.  |
| Vibration  | 5 g from 5 Hz to 500 Hz                                | <b>Electrical Data (Voltage)</b>  |  |
| Acceleration   | 10g  | Circuit   | 3-Wire (Exc, Out, Com)   |
| Shock  | 50g  | Excitation  | 9 to 30 VDC for 0-5 VDC Output, 13 to 30 VDC for 0-10 VDC Output   |
| <b>Pressure Media</b>  |  | Output <sup>7</sup>   | 0 to 5 VDC <sup>8</sup> , 0 to 10 VDC <sup>8</sup>   |
| Model 230  |  | Output Impedance  | 100 ohms   |
| Gases or liquids compatible with 17-4 PH Stainless Steel, 300 Series Viton O-Rings. Note: Hydrogen not recommended for use with 17-4 PH stainless steel. Optional Buna-N O'rings are recommended for hydrocarbon applications. |  | <b>Electrical Data (Current)</b>  |  |
| 3 & 5 Valve Manifold   |  | Circuit   | 2-Wire   |
| Gases or liquids compatible with 360 brass, Copper 122, Acetal plug valves and Nitrile O-rings.  |  | Output <sup>9</sup>   | 4 to 20mA <sup>10</sup>  |
|  |  | External Load   | 0 to 1000 ohms   |
|  |  | Minimum supply voltage (VDC)  | 9+ 0.02 x (Resistance of receiver plus line).  |
|  |  | Maximum supply voltage (VDC)  | 30+ 0.004 x (Resistance of receiver plus line).  |

<sup>1</sup> RSS of Non-Linearity, Hysteresis, and Non-Repeatability.

<sup>2</sup> Units calibrated at nominal 70°F. Maximum thermal error computed from this datum.

<sup>3</sup> Operating temperature limits of the electronics only. Pressure media temperatures may be considerably higher.

<sup>4</sup> Order assembled with the Model 230 (Code 3V) or separately as Option 891.

<sup>5</sup> Refer to drawings

<sup>6</sup> Order assembled with the Model 230 (Code 5V)

<sup>7</sup> Calibrated into a 50k ohm load, operable into a 5000 ohm load or greater.

<sup>8</sup> Zero output factory set to within ±25mV (for 5 VDC output) or ±50mV (for 10 VDC output)

Span (Full Scale) output factory set to ±25 mV (for 5 VDC output) or ± 50 mV (for 10 VDC output)

<sup>9</sup> Calibrated at factory with a 24VDC loop supply voltage and a 250 ohm load.

<sup>10</sup> Zero output factory set to within ±0.16mA. Span factory set to within ±0.16 mA


Specifications subject to change without notice.

# Model 230


## Wet-to-Wet Differential Pressure Transducer



### MODEL 230 DIMENSIONS

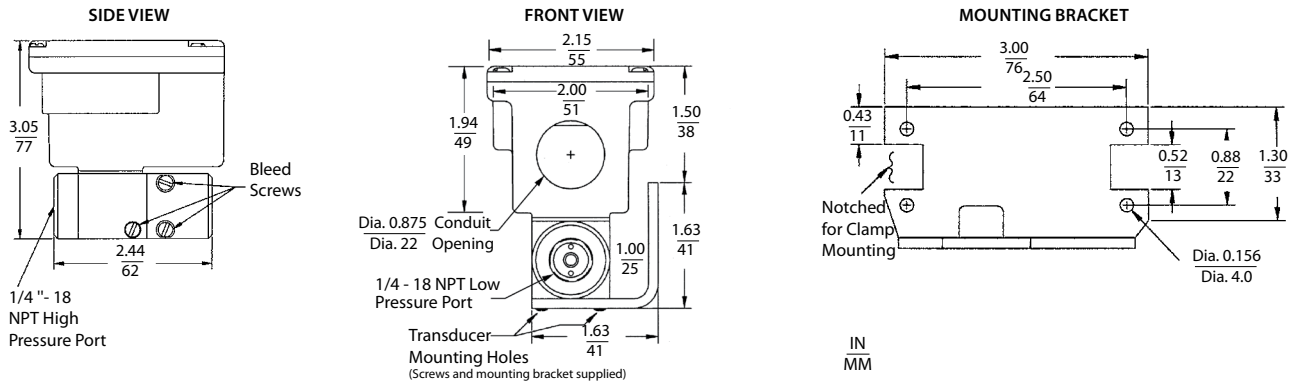

### DIMENSIONS W/ 3-VALVE MANIFOLD ASSEMBLY

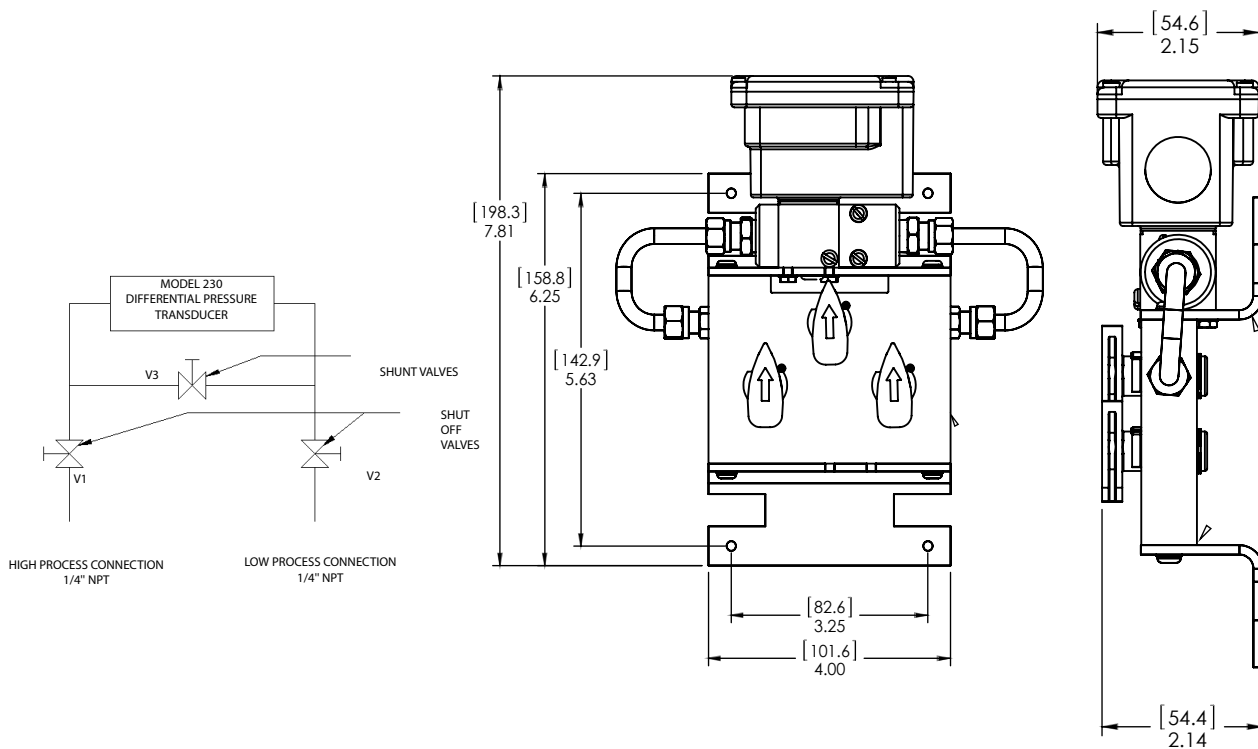

For differential pressure measurements at high line pressure (350 PSIG max), it is recommended that the pressure sensor be installed with a valve in each line, plus a shunt valve across the high and low (reference) pressure ports as shown.

# Model 230

## True Wet-to-Wet Differential Pressure Transducer




### ORDERING INFORMATION

| 2          | 3              | 0     | 1                | -  |                  |              |                   |         | -    |          |        | -     |   |                         | - |  |  |
|------------|----------------|-------|------------------|----|------------------|--------------|-------------------|---------|------|----------|--------|-------|---|-------------------------|---|--|--|
| Model      | Range          |       | Pressure Fitting |    | Output           |              | Bleed Screw Seals |         |      | Optional |        |       |   |                         |   |  |  |
| 2301 = 230 | Unidirectional |       | Bidirectional    |    | 2F               | 1/4" NPT (F) | 11                | 4-20 mA |      | Std.     | B      | Viton | C | Calibration Certificate |   |  |  |
| 001PD      | 0 to 1 PSID    | 0R5PB | ±0.5 PSID        | 3V | 3-Valve Manifold | 2D           | 0.05-5.05 VDC     |         | Opt. | A        | Buna-N |       |   |                         |   |  |  |
| 002PD      | 0 to 2 PSID    | 001PB | ±1 PSID          | 5V | 5-Valve Manifold | 2E           | 0.05-10.05 VDC    |         |      |          |        |       |   |                         |   |  |  |
| 005PD      | 0 to 5 PSID    | 2R5PB | ±2.5 PSID        |    |                  |              |                   |         |      |          |        |       |   |                         |   |  |  |
| 010PD      | 0 to 10 PSID   | 005PB | ±5 PSID          |    |                  |              |                   |         |      |          |        |       |   |                         |   |  |  |
| 025PD      | 0 to 25 PSID   | 010PB | ±10 PSID         |    |                  |              |                   |         |      |          |        |       |   |                         |   |  |  |
| 030PD      | 0 to 30 PSID   | 025PB | ±25 PSID         |    |                  |              |                   |         |      |          |        |       |   |                         |   |  |  |
| 050PD      | 0 to 50 PSID   | 050PB | ±50 PSID         |    |                  |              |                   |         |      |          |        |       |   |                         |   |  |  |
| 100PD      | 0 to 100 PSID  |       |                  |    |                  |              |                   |         |      |          |        |       |   |                         |   |  |  |

Please contact factory for versions not shown.

Ordering Example: 2301005PD2F11B = Model 230 0 to 5 PSID unidirectional, 1/4-18 NPT Male fitting, 4 to 20 mA Output, and Viton/Silicone Seals.  
 2301005PD3V11B = Model 230, 0 to 5 PSID unidirectional, 3-Valve Manifold, 4 to 20 mA, Output, and Viton/Silicone Seals (Assembled w/3- Valve Manifold).

### DIMENSIONS W/ 5-VALVE MANIFOLD ASSEMBLY

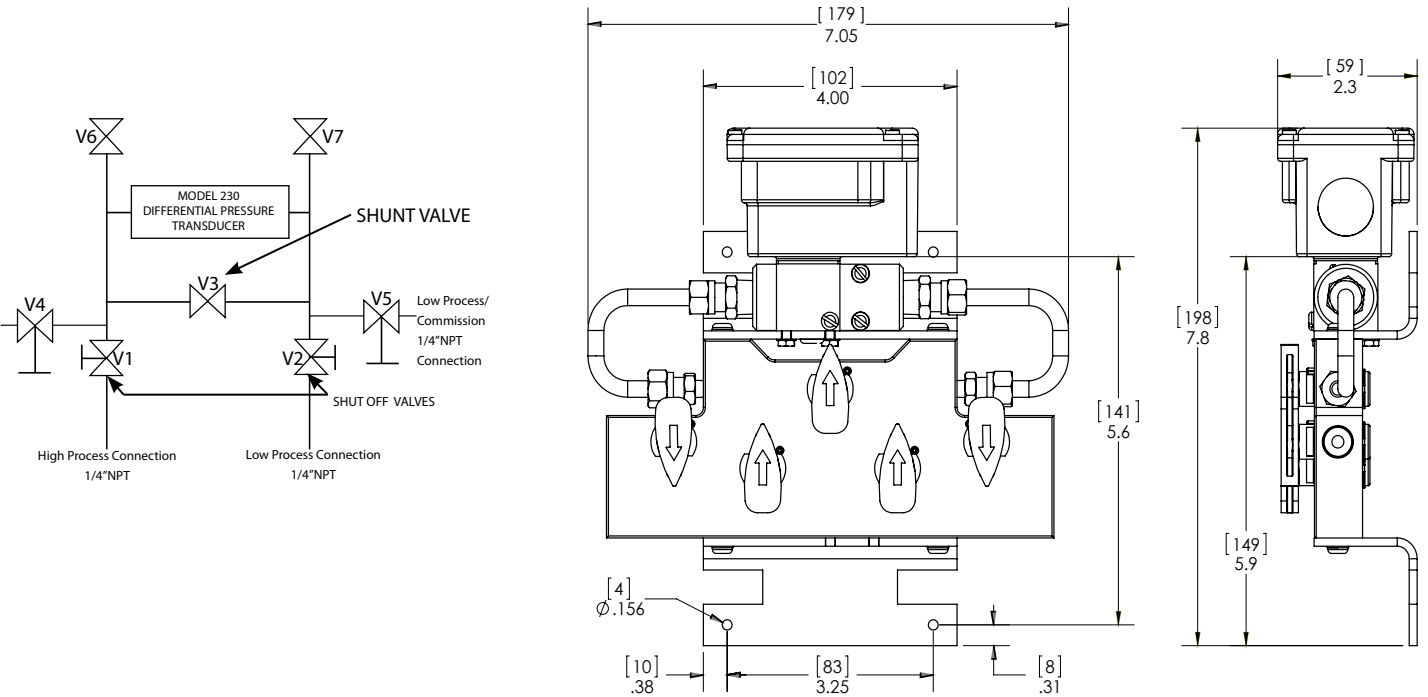

For differential pressure measurements at high line pressure (350 PSIG max), it is recommended that the pressure sensor be installed with a valve in each line, plus a shunt valve across the high and low (reference) pressure ports as shown.

Note: V6 and V7 bleed valves are not required when used with a Setra Model 230. Use the bleed screws on Model 230 to bleed the lines of air.