


# Series 4730LT

## Low Temperature SAE 100R18

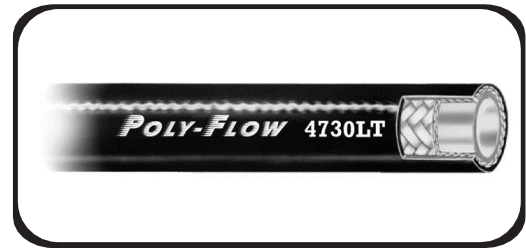

Designed for low-temperature applications on fork trucks (over-the-sheave), cold storage and refrigerated areas, material handling, construction equipment, general hydraulics and hydraulic tools, agricultural equipment, and lubrication equipment. Bonded construction for kink resistance and long life. Superior flexibility in cold temperature applications. Low coefficient of friction cover (non-stick). Excellent bend radius.

<b>Tube:</b>	Polyester elastomer.
<b>Reinforcement:</b>	One or two polyester braids.
<b>Cover:</b>	Polyester elastomer (non-stick) – black, perforated.
<b>Temperature:</b>	-40° F. to +212° F. (-40° C. to +100° C.) Limited to +150°F (+65°C) for water-based or fire resistant fluids.
<b>Branding:</b>	Ink jet

Part #	Inside Diameter		Outside Diameter		W.P. (PSI)	Burst (PSI)	Minimum Bend Rad (In.)	Weight Lbs/Ft	Coupling Series
	(In.)	(MM)	(In.)	(MM)					
4730LT-04	1/4	6.4	0.51	13.0	3000	12,000	1.8	0.06	SW
4730LT-06	3/8	9.5	0.68	17.3	3000	12,000	3.0	0.13	SW
4730LT-08	1/2	12.7	0.84	21.3	3000	12,000	3.5	0.17	SW