


SERIES RW/R5

(FITTINGS FOR HOSE SERIES 3500/3500AT SAE 100R5)

STYLE FJ-RW


Straight Swivel
Female JIC
37° Flare

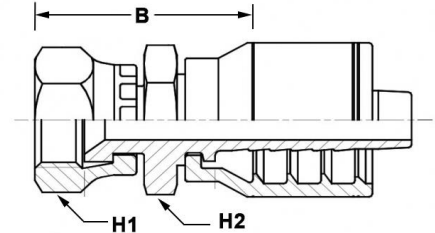

Part No.	Thread Size	Hose I.D. Inches	Dimensions					
			B		H1		H2	
			in.	mm	in.	mm	in.	mm
4FJ-4RW	7/16-20	3/16	1.10	27.9	0.59	15.0	0.44	11.2
6FJ-6RW	9/16-18	5/16	1.20	30.5	0.75	19.1	0.55	14.0
8FJ-8RW	3/4-16	13/32	1.15	29.2	0.94	23.9	0.75	19.1
10FJ-10RW	7/8-14	1/2	1.30	33.0	1.06	26.9		
12FJ-12RW	1-1/16-12	5/8	1.94	49.3	1.26	32.0	1.06	26.9
16FJ-16RW	1-5/16-12	7/8	2.09	53.1	1.50	38.1	1.26	32.0

STYLE FJ90T-RW


90° Bent Tube
Swivel Female JIC
37° Flare

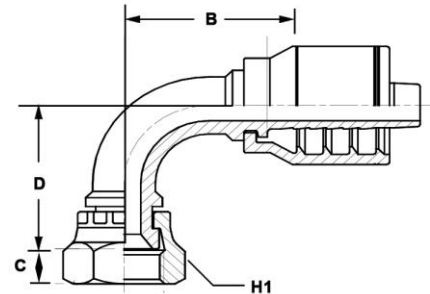

Part No.	Thread Size	Hose I.D. Inches	Dimensions							
			B		C		D		H1	
			in.	mm	in.	mm	in.	mm	in.	mm
4FJ90T-4RW	7/16-20	3/16	0.94	23.9	0.33	8.4	1.14	29.0	0.59	15.0
6FJ90T-6RW	9/16-18	5/16	1.18	30.0	0.37	9.4	0.87	22.1	0.75	19.1
8FJ90T-8RW	3/4-16	13/32	1.24	31.5	0.42	10.7	1.18	30.0	0.95	24.1
10FJ90T-10RW	7/8-14	1/2	1.67	42.4	0.49	12.5	1.57	39.9	1.06	26.9
12FJ90T-12RW	1-1/16-12	5/8	1.91	48.5	0.54	13.7	1.87	47.5	1.26	32.0
16FJ90T-16RW	1-5/16-12	7/8	2.99	75.9	0.63	16.0	3.03	77.0	1.50	38.1

STYLE FSAE-RW


Straight Swivel Female
SAE 45° Flare

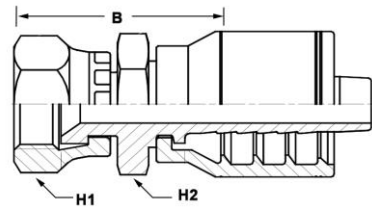

Part No.	Thread Size	Hose I.D. Inches	Dimensions					
			B		H1		H2	
			in.	mm	in.	mm	in.	mm
6FSAE-6RW	5/8-18	5/16	1.37	34.8	0.87	22.1	0.75	19.1

STYLE MP-RW


Rigid Male Stem
NPTF

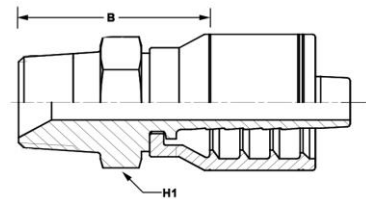

Part No.	Thread Size	Hose I.D. Inches	Dimensions			
			B		H1	
			in.	mm	in.	mm
4MP-4RW	1/4--18	3/16	1.02	25.9	0.55	14.0
6MP-6RW	3/8--18	5/16	1.10	27.9	0.75	19.1
8MP-8RW	1/2--14	13/32	1.30	33.0	0.87	22.1
12MP-12RW	3/4--14	5/8	1.61	40.9	1.06	26.2
16MP-16RW	1--11-1/2	7/8	1.87	47.5	1.42	36.1

STYLE FJ-R5 (Reusable)


Straight Swivel
Female JIC
37° Flare

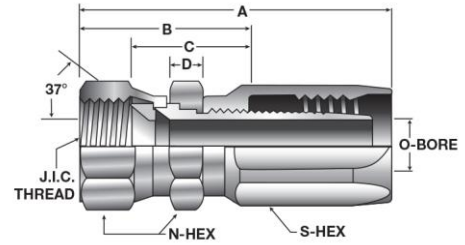

Part No.	Thread Size	Hose I.D. Inches	Dimensions											
			A		B		C		D		N-Hex		S-Hex	
			in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
4FJ-4R5	7/16--20	3/16	1.94	49.3	1.19	30.2	0.83	21.1	0.19	4.8	0.56	14.3	0.63	15.9
5FJ-5R5	1/2--20	1/4	2.08	52.8	1.30	33.0	0.94	23.9	0.19	4.8	0.63	15.9	0.69	17.5
6FJ-6R5	9/16--18	5/16	2.31	58.7	1.41	35.8	1.02	25.9	0.23	5.8	0.69	17.5	0.81	20.6
8FJ-8R5	3/4--16	13/32	2.84	72.1	1.58	40.1	1.14	29.0	0.28	7.1	0.88	22.2	0.94	23.8
10FJ-10R5	7/8--14	1/2	3.06	77.7	1.67	42.4	1.17	29.7	0.31	7.9	1.00	25.4	1.13	28.6
12FJ-12R5	1-1/16--12	5/8	3.50	88.9	1.92	48.8	1.34	34.0	0.38	9.7	1.25	31.8	1.25	31.8
16FJ-16R5	1-5/16--12	7/8	3.19	81.0	1.92	48.8	1.30	33.0	0.38	9.7	1.50	38.1	1.44	36.5
20FJ-20R5	1-5/8--12	1-1/8	3.38	85.9	2.03	51.6	1.38	35.1	0.41	10.4	2.00	50.8	1.75	44.5

STYLE FJ45T-R5 (Reusable)


45° Bent Tube
Swivel Female JIC
37° Flare

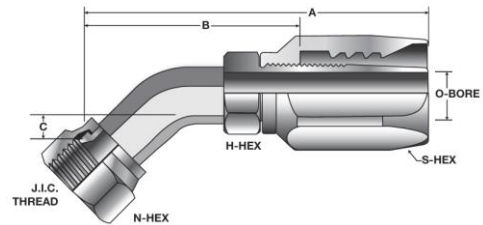

Part No.	Thread Size	Hose I.D. Inches	Dimensions											
			A		B		C		N-Hex		H-Hex		S-Hex	
			in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
4FJ45T-4R5	7/16--20	3/16	1.84	46.7	1.10	27.9	0.33	8.4	0.56	14.3	0.56	14.3	0.63	15.9
6FJ45T-6R5	9/16--18	5/16	2.23	56.6	1.33	33.8	0.39	9.9	0.69	17.5	0.56	14.3	0.81	20.6
8FJ45T-8R5	3/4--16	13/32	2.98	75.7	1.84	46.7	0.55	14.0	0.88	22.2	0.69	17.5	0.94	23.8
10FJ45T-10R5	7/8--14	1/2	3.23	82.0	1.64	41.7	0.63	16.0	1.00	25.4	0.88	22.2	1.13	28.6
12FJ45T-12R5	1-1/16--12	5/8	3.78	96.0	2.22	56.4	0.77	19.6	1.25	31.8	1.13	28.6	1.25	31.8

STYLE FJ90T-R5 (Reusable)


90° Bent Tube
Swivel Female JIC
37° Flare
(Mandrel style)

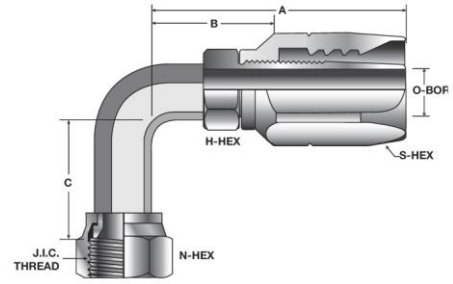

Part No.	Thread Size	Hose I.D. Inches	Dimensions											
			A		B		C		N-Hex		H-Hex		S-Hex	
			in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
4FJ90T-4R5	7/16--20	3/16	1.75	44.5	1.00	25.4	0.69	17.5	0.56	14.3	0.56	14.3	0.63	15.9
6FJ90T-6R5	9/16--18	5/16	2.13	54.1	1.23	31.2	0.84	21.3	0.69	17.5	0.69	17.5	0.81	20.6
8FJ90T-8R5	3/4--16	13/32	2.75	69.9	1.61	40.9	1.09	27.7	0.88	22.2	0.88	22.2	0.94	23.8
10FJ90T-10R5	7/8--14	1/2	2.94	74.7	1.66	42.2	1.23	31.2	1.00	25.4	1.00	25.4	1.13	28.6
12FJ90T-12R5	1-1/16--12	5/8	3.75	95.3	2.17	55.1	1.81	46.0	1.25	31.8	1.25	31.8	1.25	31.8

STYLE MP-R5

Rigid Male Pipe
NPTF
(Non-Mandrel Style)

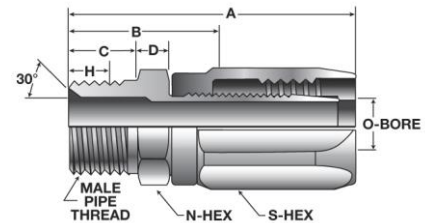

Part No.	Thread Size	Hose I.D. Inches	Dimensions											
			A		B		C		D		N-Hex		S-Hex	
			in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
4MP-4R5	1/4--18	3/16	1.86	47.2	1.11	28.2	0.56	14.2	0.19	4.8	0.56	14.2	0.63	16.0
4MP-5R5	1/4--18	1/4	1.97	50.0	1.19	30.2	0.56	14.2	0.19	4.8	0.56	14.2	0.69	17.5
6MP-6R5	3/8--18	5/16	2.20	55.9	1.27	32.2	0.56	14.2	0.25	6.4	0.69	17.5	0.81	20.6
8MP-8R5	1/2--14	13/32	2.72	69.1	1.56	39.6	0.75	19.1	0.31	7.9	0.88	22.3	0.94	23.9
8MP-10R5	1/2--14	1/2	2.86	72.6	1.59	40.4	0.75	19.1	0.28	7.1	0.88	22.3	1.13	28.7
12MP-12R5	3/4--14	5/8	3.20	81.3	1.67	42.4	0.75	19.1	0.34	8.6	1.13	28.7	1.25	31.8
16MP-16R5	1--11-1/2	7/8	2.98	75.7	1.72	43.7	0.94	23.9	0.39	9.9	1.38	35.1	1.44	36.6