


# Drum Pumps For Non-Corrosive Liquids

## ALUMINUM PUMP PACKAGE

### With Filter (Electric)

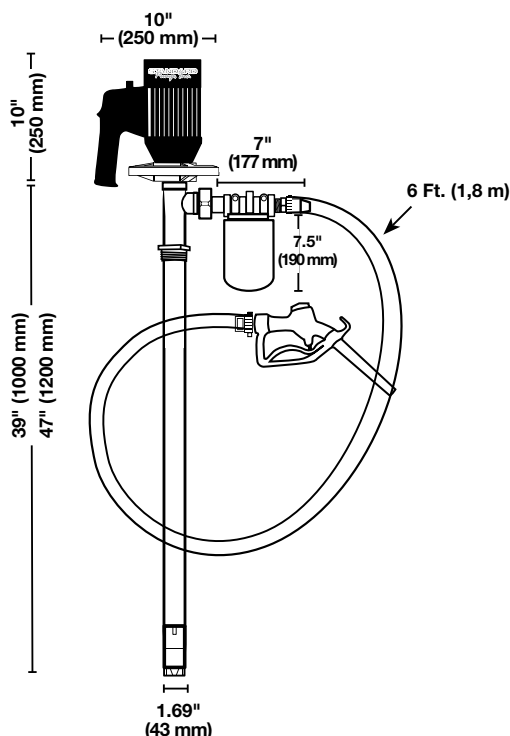

### Technical Specifications

**Package:** .....Motor, Pump, Hose, Storage Bracket  
Filter, Barrel Adapter & Hand Nozzle

**Motor Type:** .....Open Drip Proof (IP44)

**Pump Assembly:** .....Aluminum, Carbon, PTFE & SS316

**Immersion Length:**..... 39" (1000 mm) or 47" (1200 mm)

**Discharge Hose:**..... PVC, 1" (25 mm) I.D., 6 ft. (1,8 m)

**Hand Nozzle:** .....Aluminum, 1" (25 mm)

**Discharge:**..... 1" (25 mm) Hose Barb

**Pump Design:**..... Sealless / Centrifugal

**Maximum Viscosity:** ..... 1500 cps (mPas)

**Maximum Specific Gravity:** ..... 1.8

**Maximum Temp:** .....175° F (80° C)

**Maximum Flow Rate:**..... 15 GPM (56 LPM)

### Package Numbers:

Drums:

Pkg P/N	Motor	Volts	Pump Tube	Filter
9470	SP-280P	110V	SP-AL-HH-39	3 Micron
9471	SP-280P	110V	SP-AL-HH-39	10 Micron
9472	SP-280P	110V	SP-AL-HH-39	25 Micron
9473	SP-280P-2	220V	SP-AL-HH-39	3 Micron
9474	SP-280P-2	220V	SP-AL-HH-39	10 Micron
9475	SP-280P-2	220V	SP-AL-HH-39	25 Micron

Tanks:

Pkg P/N	Motor	Volts	Pump Tube	Filter
9480	SP-280P	110V	SP-AL-HH-47	3 Micron
9481	SP-280P	110V	SP-AL-HH-47	10 Micron
9482	SP-280P	110V	SP-AL-HH-47	25 Micron
9483	SP-280P-2	220V	SP-AL-HH-47	3 Micron
9484	SP-280P-2	220V	SP-AL-HH-47	10 Micron
9485	SP-280P-2	220V	SP-AL-HH-47	25 Micron

**STANDARD**  
*Pumps, Inc.*

www.standardpump.com