

Quality Coating Control

Innovation
Quality
Expertise

wilevco

SERIES 935 BATTER MIXER



**The Wilevco Series 9
is an automatic,
low shear batter mixer**



For moderate capacity lines, the Series 935 will mix from 680 kg/hr to 1134 kg/hr (1,500 to 2,500 lbs/hr) of liquid batter.



FEATURES

- Precise viscosity control
- Interfaces easily with all types of batter applicators
- PLC controlled with touch-screen operator interface
- Connectivity to plant automation and data acquisition
- Open frame for ease of maintenance and sanitation
- On-board recipe building
- Direct pump drives
- Rugged and sanitary construction
- Mixes the full range of batters



APPLICATIONS

- Wheat flour
- Corn flour
- Starch
- Leavened batters
- Flavor added coatings



SERIES 935 BATTER MIXER

Technical Specifications


Length: 1470 mm • 54 inches
Height: 1370 mm • 54 inches
Width: 510 mm • 36 inches
Weight: 286 kgs • 630 lbs
Control Voltage: 24 VDC
Motors: TE/TEFC 4.05 kw
Model 935: 5.5 HP

Water: 38 L/min @ 2.7 atmospheres • 10 GPM @ 40 PSI minimum
Model 935: 20 mm (3/4 inch) minimum service line

Mixed Batter

Capacity: Model 935: 1134 kgs/hr • 2500 lbs/hr

TYPICAL INSTALLATION AND BATTER FLOW

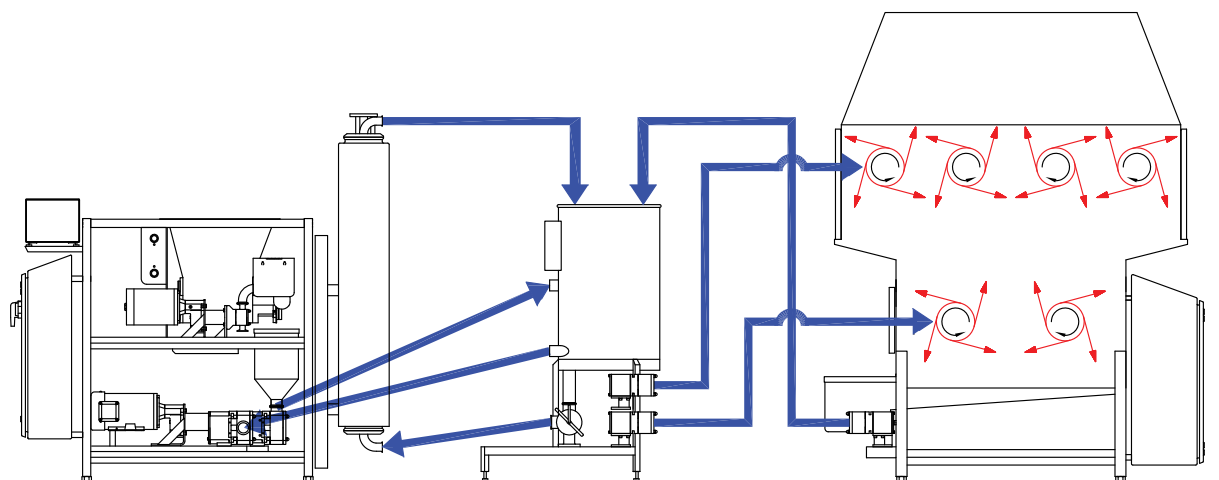

WILEVCO SERIES 9 MIXER AND
4.5x6 CRYOLATOR

WILEVCO RTS50 RESERVE TANK

WILEVCO RAS4-40 SPRAY APPLICATOR