


UNISOURCE
Series 405
Stainless Steel
Reducing Pump
Connector

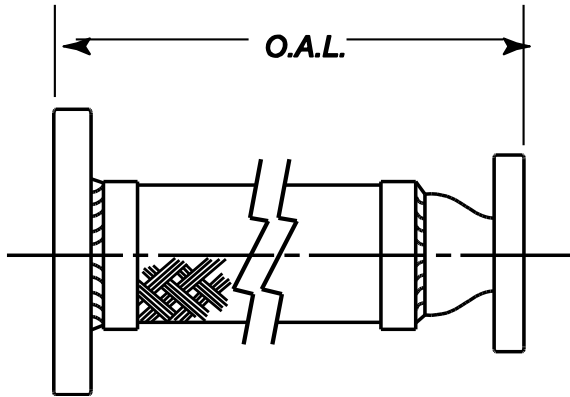

Construction, Materials:

Hose (B): *Type 321 Stainless Steel*
Braid (B): *Type 304 Stainless Steel*
Flanges (A,D): *150# Drilled, Carbon Steel Plate Flanges*
Reducer (C): *Concentric Schedule 40 Carbon Steel*

For pulsating pressure, reduce working pressure by 50%.

Quant	Pipe Sizes (Inches)	Model Number	Overall Length (In)	Hose Size (In)	Live Length (In.)	Static Bend Radius (In)	# of Braids	Working Pressure (PSI)	Burst Pressure (PSI)	Conc Reducer Lgth (Inches)
	2-1/2 x 2	405-2520	13	2-1/2	6-1/4	6-1/2	1	387	581	3-1/2
	3 x 2	405-3020	13	3	6-1/4	8-1/2	1	316	459	3-1/2
	3 x 2-1/2	405-3025	13	3	5-3/4	8-1/2	1	316	459	3-1/2
	4 x 2	405-4020	13	4	5-3/4	11	1	232	348	4
	4 x 2-1/2	405-4025	13	4	5-3/4	11	1	232	348	4
	4 x 3	405-4030	13	4	5-3/4	11	1	232	348	4
	5 x 2-1/2	405-5025	16	5	7-5/8	14	1	191	287	5
	5 x 3	405-5030	16	5	7-5/8	14	1	191	287	5
	5 x 4	405-5040	16	5	7-5/8	14	1	191	287	5
	6 x 3	405-6030	17	6	8-3/8	16	1	165	247	5-1/2
	6 x 4	405-6040	17	6	8-3/8	16	1	165	247	5-1/2
	6 x 5	405-6050	17	6	8	16	1	165	247	5-1/2
	8 x 4	405-8040	18	8	8-3/8	19	1	234	350	6
	8 x 5	405-8050	18	8	8-1/4	19	1	234	350	6
	8 x 6	405-8060	18	8	8-1/4	19	1	234	350	6
	10 x 6	405-1060	18	10	7-1/4	24	1	230	344	7
	10 x 8	405-1080	18	10	7-1/4	24	1	230	344	7
	12 x 10	405-1210	20	12	8	28	1	161	241	8

Customer: _____
 Project: _____
 Engineer: _____
 P.O.#: _____



Unisource Series 405
Stainless Steel Braided
Reducing Pump Connector